

Canada West

(Banff & Calgary)


Average score 58%

Highest 141%
Lowest 11%

Practical effect to be expected of SolarDrive S2E (200 W)

Trail type - golf course	18 holes	kWh	Flat	Hilly	Mount.
Consumption			0.80	1.10	1.60
Power production	High (best month)	kWh	1.13	1.13	1.13
PRP* supplied by SolarDrive S2E	High (best month)	kWh	141%	103%	71%
Power production	Low (weakest month)	kWh	0.18	0.18	0.18
PRP* supplied by SolarDrive S2E	Low (weakest month)	kWh	23%	17%	11%
Power production	Yearly Average	kWh	0.64	0.64	0.64
PRP* supplied by SolarDrive S2E	Yearly Average	kWh	79%	58%	40%

*Percentage of Required Power

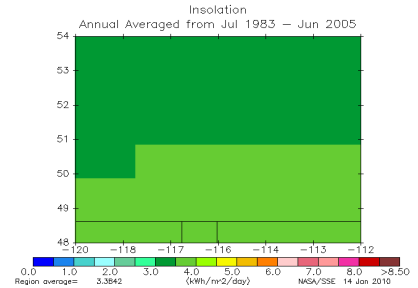

Basic data


Nominal effect	kW	0.200											Lat.	49.1	Lon.	-123.1
Solar insolation		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Average		
kWh/m2/day**		1.13	2.04	3.34	4.73	5.52	5.88	6.33	5.3	3.8	2.43	1.36	0.95	3.57		
Avg. day temperature (C)		-5.37	-3.42	1.47	9.41	14.8	18.6	22.1	21.5	15.1	8.26	-0.56	-4.86	8.16		
Avg. day temperature (F)		22.3	25.8	34.6	48.9	58.6	65.5	71.8	70.7	59.2	46.9	31.0	23.3	46.7		
Temperature loss factor		1.03	1.03	1.01	0.99	0.97	0.96	0.95	0.95	0.97	0.99	1.02	1.03	0.95		
System loss factor		0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94		
Expected output kWh		0.22	0.39	0.63	0.88	1.01	1.06	1.13	0.95	0.69	0.45	0.26	0.18	0.64		

Percentage of consumption driving 18 golf holes on

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Average
Flat trail	27%	49%	79%	110%	126%	133%	141%	118%	87%	57%	32%	23%	79%
Hilly trail	20%	36%	58%	80%	92%	96%	103%	86%	63%	41%	24%	17%	58%
Mountainous trail	14%	25%	40%	55%	63%	66%	71%	59%	43%	28%	16%	11%	40%

Additional golf holes using SolarDrive on Top

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Average
Flat trail	5	9	14	20	23	24	25	21	16	10	6	4	14
Hilly trail	4	6	10	14	16	17	18	15	11	7	4	3	10
Mountainous trail	2	4	7	10	11	12	13	11	8	5	3	2	7

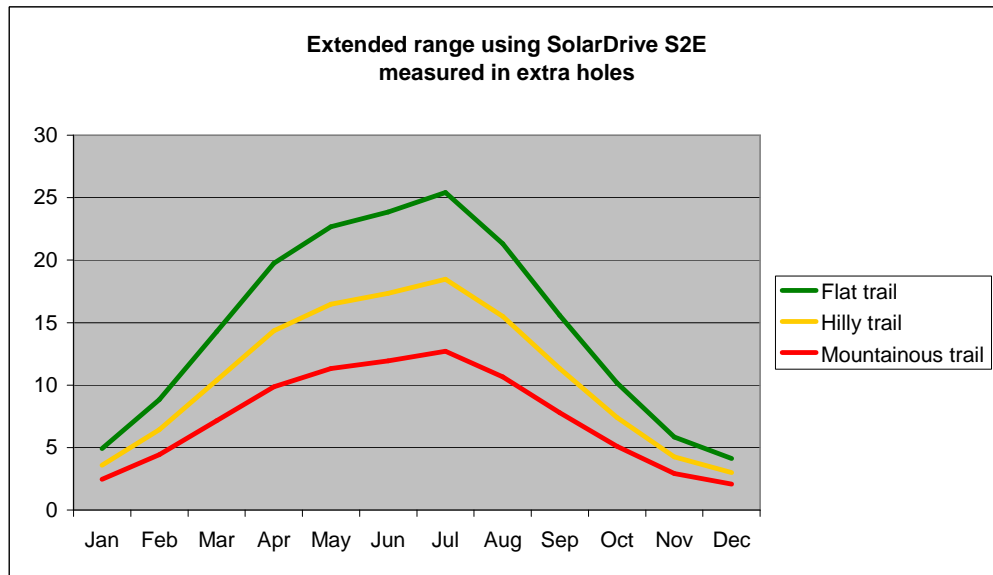

Potential CO2 savings/car/year* 115 to 197 kilos or 253 to 435 lbs.**

**Source: NASA Langley Research Center Atmospheric Science Data Center (22 year average)

***CO2 savings are calculated compared to grid electricity supplied from modern power plants burning fossil fuels (0.49-0.85 kg CO2/kWh)

****If battery charge level is low from the start the S2E must be allowed the necessary time to charge as the energy is accumulated over the day

Disclaimer:

SolarDrive takes no responsibility for the correctness of the basic data obtained from NASA nor for the actual experienced results. The figures above is presented as a guideline only. The actual result may be influenced by many other factors as well e.g. length of course, battery watering, altitude, time of year, time of day, present weather conditions, local shades from houses, trees, mountains, tire inflation, general maintenance etc.